



AirLancer Extender Indoor Antennas





Range extension and higher performance for office use

- antennas with directional amplification or general extension of radio cell
- antennas for mobile use, at access points or ceiling mount
- complete package including mounting material and cable

LANCOM Wireless Access Points and Client Adapter are already equipped with antennas for basic utilization. In order to achieve better connections and extend range with AirLancer Indoor antennas, Access Points and Client adapters by LANCOM Systems are equipped with connectors for external antennas.


AirLancer Extender Indoor Antennas

	AirLancer Extender I-60ag	AirLancer Extender I-180
		
Designed for	Dualband Indoor Directional Antenna for up to 100% range extension	Indoor-Antenne für die praktische Decken-Installation
Frequency range	2400 – 2500 MHz (ISM) 5150 – 5875 MHz	2400 – 2483,5 MHz (ISM)
Antenna gain	2.4 GHz, 6 dBi (minus about 2 dB cable loss), 5 GHz, 8 dBi (minus about 3 dB cable loss)	4 dBi (minus about 0.7 dB cable loss)
Range	Up to 100% more	Up to 50% more
E-plane-characteristics	2.4 GHz: 66° horizontal, 79 ° vertical 5 GHz: 55° horizontal, 52 ° vertical	70° horizontal, 360° vertical, 40° downwards
Polarisation	vertical, linear	vertical, linear
VSWR	2.0 : 1	1.8 : 1
Impedance	50 Ohm	50 Ohm
Mounting	table stand with hole for wall mount	installation at lowered ceilings
Dimensions (H x W x D)	75 x 72 x 12 mm	133 x 133 x 42 mm
cable and connector	1.5 m with Reverse-SMA connector for LANCOM Access Points	2 m coax cable, Reverse-SMA-connector for Access Points, proprietary connector for AirLancer adapter
Environmental characteristics	-10°C up to 55°+, to 95% humidity at 25°	-40°C to +80°C, to 99% humidity at 25°C
Optional connections	Direct to the Reverse SMA connector of the main antenna connector of LANCOM Wireless access points. When combining the AirLancer Extender antennas with the OAP Wireless, the supplied cables are not suitable for use with the SMA connector. The access point is supplied with a 1m adapter cable.	
Certifications	The antenna is allowed to be used only with the correspondant cable and LANCOM or AirLancer devices respectively. The complete system is CE conform and can be used in all countries of EU and Switzerland. Complies with: ETS 300 328, ETS 300 826, EN 55022, EN 55024, EN 60950	
Service	Warranty 2 Jahre Support via Hotline and Internet	
Item no.	61214	60914


AirLancer Extender Indoor Antennas

AirLancer Extender I-60ag


2.4 GHz: Horizontal Pattern

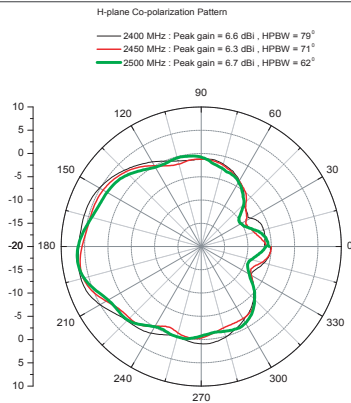


2.4 GHz: Vertikal Pattern

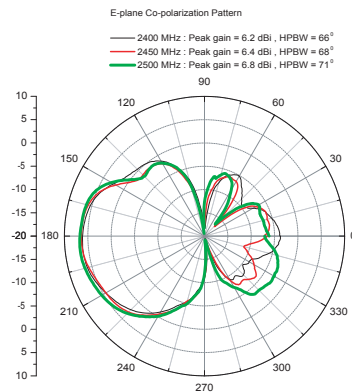

5 GHz: Horizontal Pattern

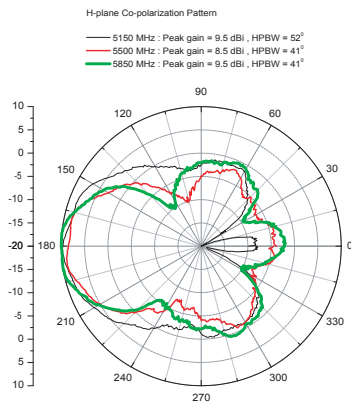


5 GHz: Vertikal Pattern

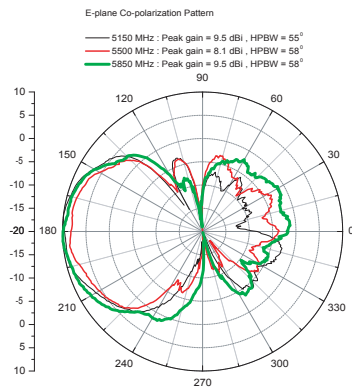

AirLancer Extender I-180

Horizontal Pattern

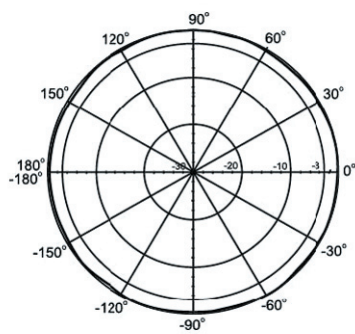

Vertical Pattern

